


Multi Color  
Option™

DDC  
Wired



## Friend F7

In this documentation you will find information about:

- Description
- Placement
- Mounting system
- Maintenance
- Connections
- Options
- Dynamic Damping Control
- Technical specifications

### Description

The F7 is a compact full-range monitor, with double 5" woofer, in combination with a high-power ferrofluid cooled soft-dome tweeter, in a trapezoidal cabinet. The components are mounted in a "d'Appolito" configuration, for a stable and consistent sound field. It is recommended for applications where medium output, high-quality reinforcement is needed. The rugged birch housing and the Protecture™ finish, together with the multiple mounting options make the F7 also ideal for "mobile use" (speech).

### Placement

The F7 can be placed standing on the floor, a shelf, platform, stand, etc. or can be mounted on the wall or ceiling. For optimum response, always make sure there are no obstructions in front of the cabinet and that the cabinet is projected ("aimed") at the listening position. Please note that bass response may vary with the position of the cabinet, through "acoustic coupling" (floor, ceiling, wall reflections).

### Mounting system

The F7 can be mounted in a wide variety of positions. Two M8 nuts are located on the top and bottom of the cabinet for attaching specific mounting brackets. The M6 nuts on the back enable use of OmniMount 50-series, MultiMount-8 brackets or equivalent. For attaching the bracket to the cabinet, please remove the specific inserted plastic caps.

### Maintenance

Maintenance on the F7, especially on the drivers and filters, is best left to official Stage Accompany service personnel. However, cleaning of the cabinet can easily be done by yourself with a damp lint-free cloth.

### Connections


The F7 has two SpeakON NL4 connectors and one spring-terminal connector for connecting separate wires.

(Caution: when linking, make sure nominal impedance stays within amplifier specification!).

When using the spring-terminals, be aware of the right polarity (see connector panel).

### Options


The F7 is standard finished in SA Black Protecture, but is also available in any possible RAL color (Multi Color Option™). Available brackets are: adjustable U-bracket for wall/ceiling mounting and a fork/swivel bracket for stand or truss mounting. Both brackets can be fitted with a stand mount adaptor, a TV-pin or a truss clamp. The connector adaptors can also be mounted directly onto the cabinet (on M8 nut).

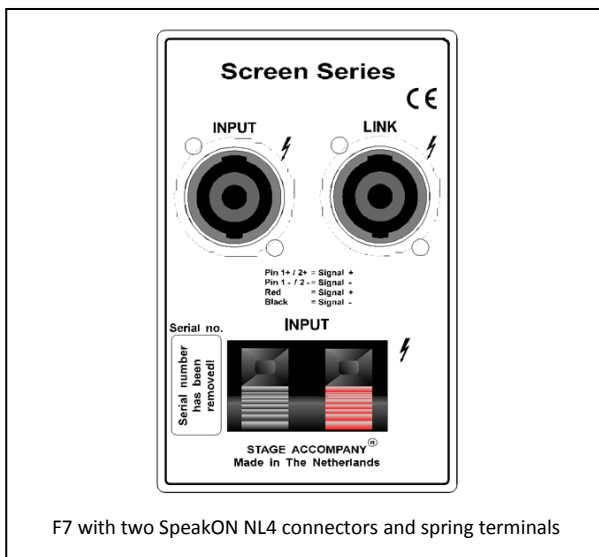

F7 with two SpeakON NL4 connectors and spring terminals


## Wiring for DDC™

For absolute top quality sound reproduction, the F7 is equipped with Dynamic Damping Control™. The DDC™ system is based on two loudspeaker wires that return from the speaker to the (SA) amplifier. The picture on the right shows the wiring of SpeakON NL4 connector in combination with the DDC™ system.

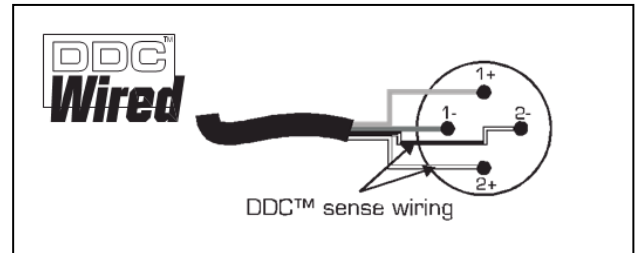

## Technical specifications

Frequency response	: 80Hz – 20kHz (+/- 3dB)
Transducers	: 2 x 5" LF driver 1 x 1" ferrofluid cooled soft-dome tweeter
Cross-over frequency	: 3000Hz
Nominal impedance	: 8Ω
Sensitivity @ 1W/1m	: 92dB
Max. RMS power	: 140W
Max. Peak power	: 300W
SPL program/peak	: 113dB/116dB
Coverage angles (@ 2kHz H x V)	: 120° x 90°
Enclosure construction	: 15mm Birch plywood, Protecture finish
Color	: SA Black, other colors on request
Front	: expanded steel
Connectors	: 2 x SpeakOn NL4 (linked), 1 x spring-terminal
Physical dimensions (H x W x D)	: 428mm x 176mm x 173mm (16.9" x 6.9" x 6.8")
Weight	: 6kg (13.2lb)
Warranty	: 5 years limited (1 year on 'moving parts')

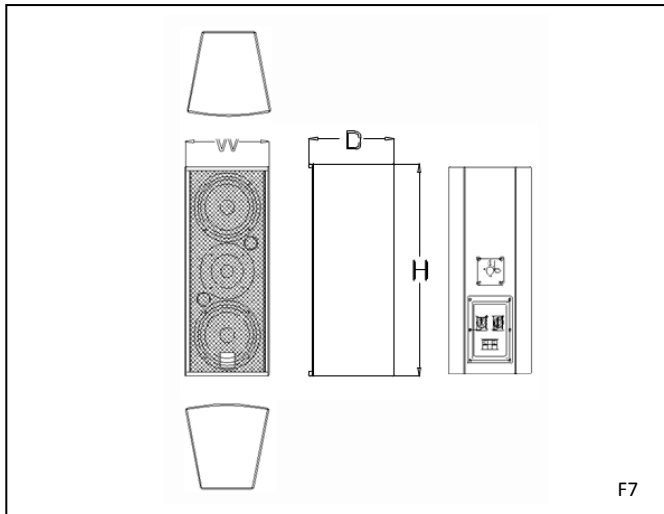

Stage Academy bv  
Haven 28  
2984 BR Ridderkerk  
The Netherlands  
Tel: 31 (0)180 426225  
Fax: 31 (0)180 421831  
E-mail: info@StageAcademy.com

Copyright 2013 Stage Academy bv .  
The information in this document is continually being developed. Whilst every effort has been made to make it as accurate as possible, no warranty of accuracy is made or implied by the makers. Stage academy shall have neither liability, nor responsibility to any person or entity with the respect to loss or damages in connection with or arising from the information contained in this document

***That's How Music Should Sound!***